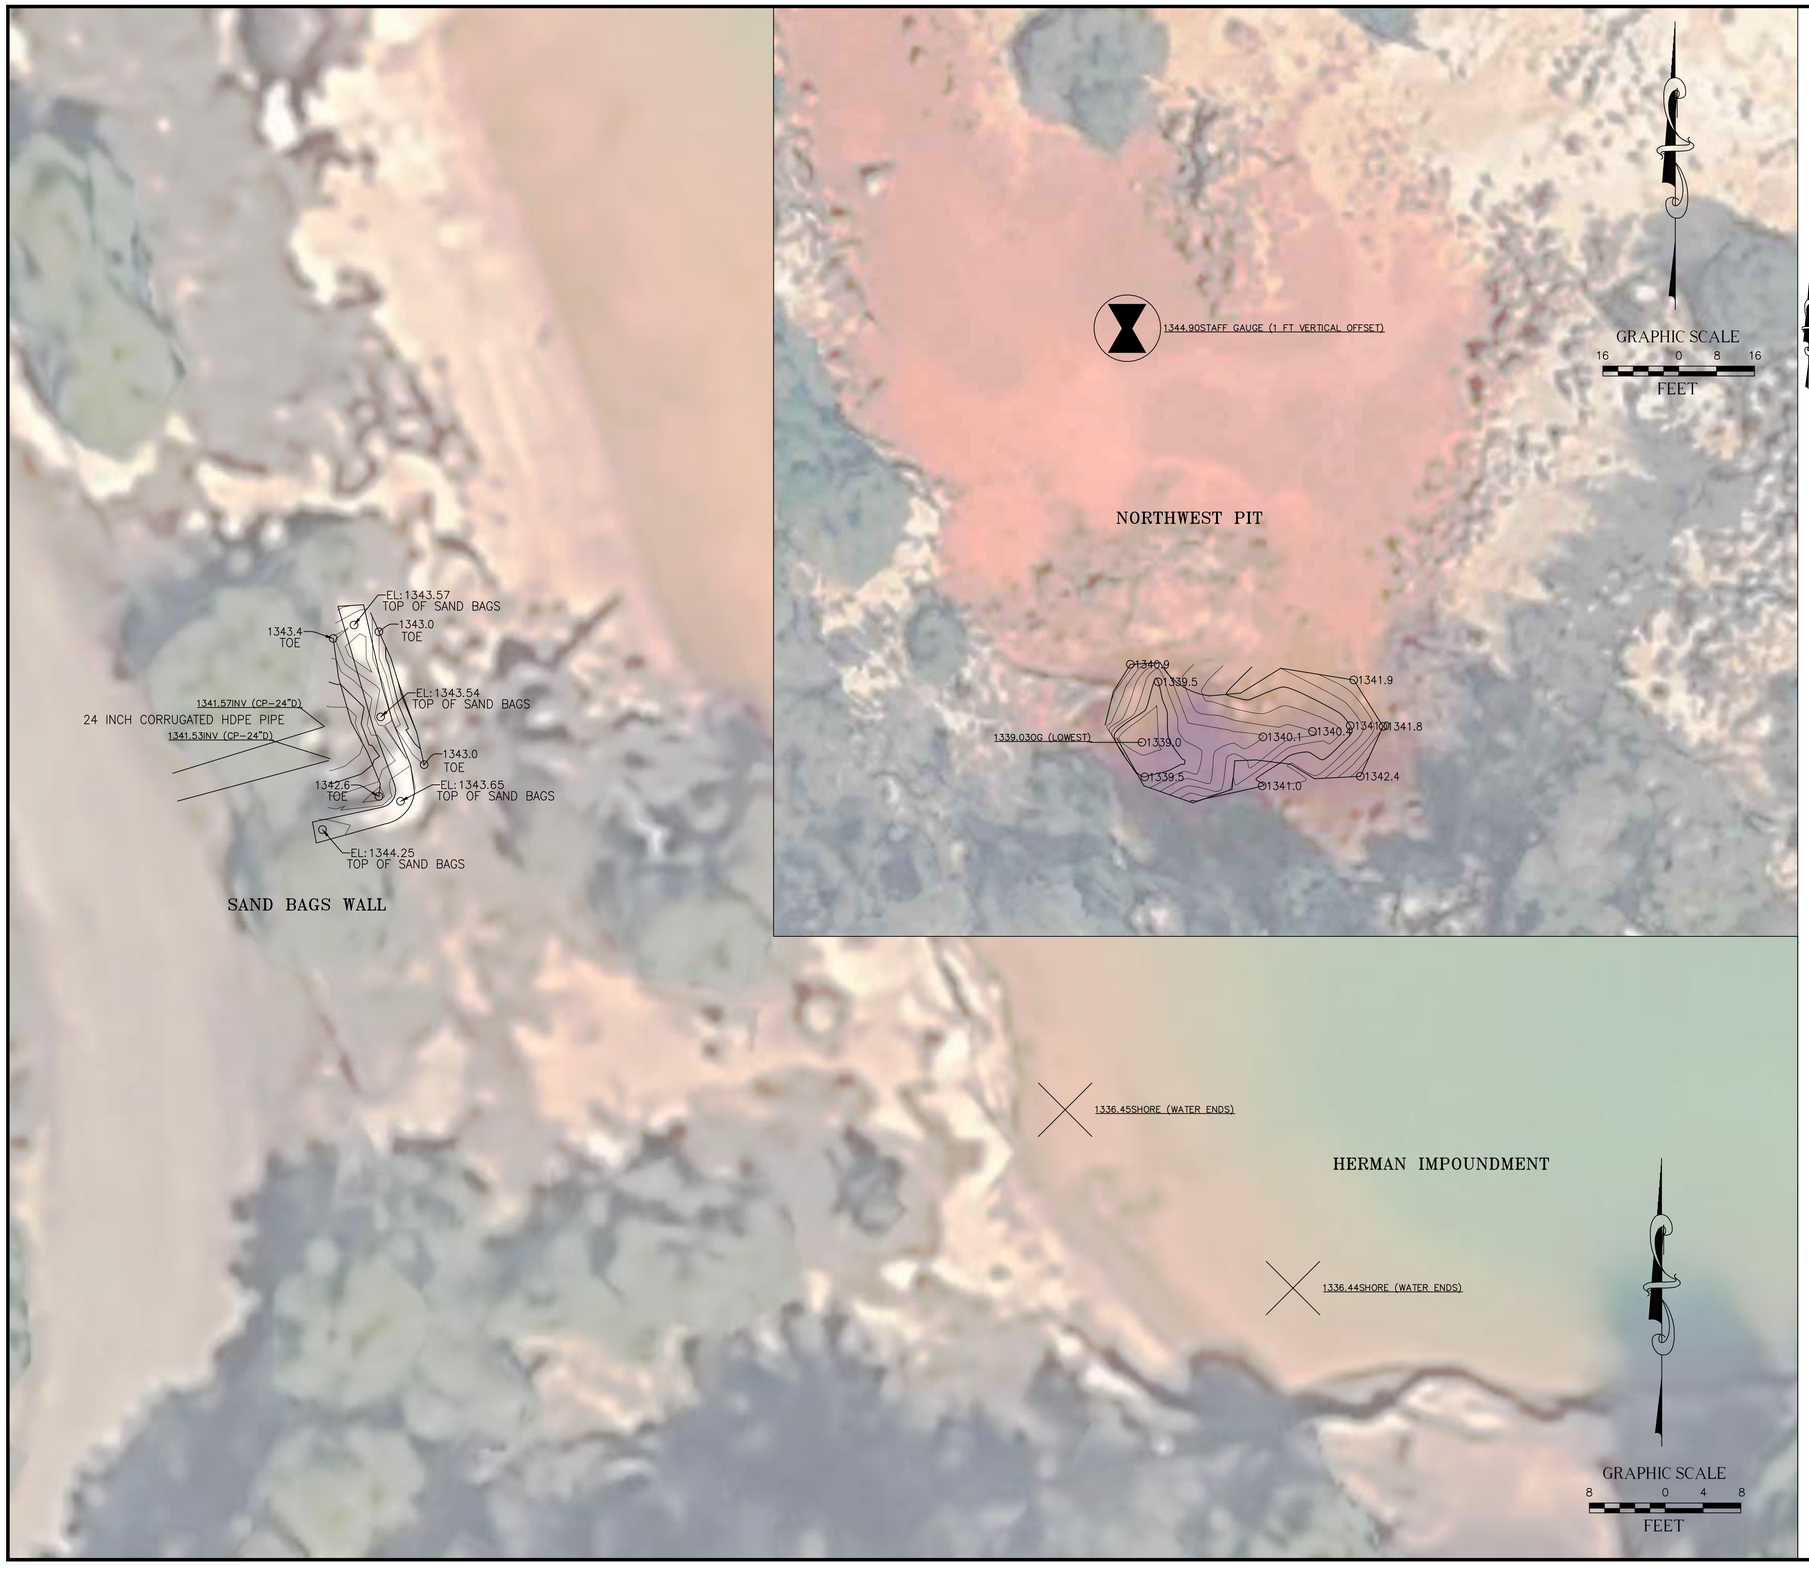

VICINITY MAP

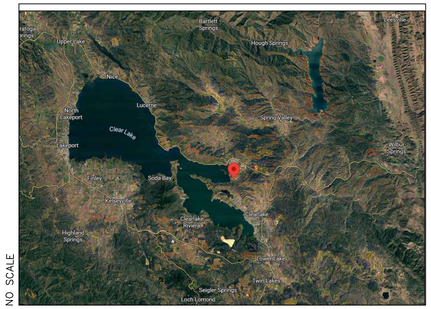

ADDITIONAL LIMITED TOPOGRAPHIC SURVEY

1. NORTHWEST PIT - SURVEY OF THE LOWEST GROUND SURFACE ELEVATIONS AND SURROUNDING PIT PERIMETER.
2. NORTHWEST PIT STAFF GAUGE - SURVEY OF THE STAFF GAUGE AND GROUND ELEVATION AT THE BOTTOM OF THE PIT.
3. HERMAN IMPOUNDMENT - SURVEY OF THE STAFF GAUGE AND WATER SURFACE ELEVATION.
4. SANDBAG WALL - SURVEY OF THE TOP AND TOE OF THE SANDBAG WALL.
5. CORRUGATED DRAINAGE PIPE - SURVEY OF THE PIPE INVERT ELEVATION.

DATUM

HORIZONTAL COORDINATES SHOWN HEREON ARE REFERENCED TO THE CALIFORNIA COORDINATE SYSTEM OF 1983 (CCS83), ZONE 2, U.S. SURVEY FEET (USSF). VERTICAL ELEVATIONS SHOWN HEREON ARE REFERENCED TO THE NORTH AMERICAN VERTICAL DATUM OF 1988 (NAVD 88) AND WERE DERIVED FROM GNSS OBSERVATIONS UTILIZING THE NATIONAL GEODETIC SURVEY (NGS) GEOID18 GEOID MODEL.

BENCHMARK

THE SITE BENCHMARK IS CONTROL POINT #305, A 5/8" REBAR W/ CAP SET IN AGROUND AS SHOWN HEREON.
ELEVATION: 1408.64 FEET (NAVD 88).

METHODOLOGY

GPS RTK OBSERVATIONS. OCCUPIED CONTROL POINT #305 (5/8" REBAR W/ CAP) FIXED WITH GPS BASE AND RADIO. OBSERVED ADDITIONAL CONTROL POINTS AND OTHER PREVIOUSLY MAPPED FEATURES FOR A REDUNDANT SURVEY CHECK PRIOR TO WORK STARTING. COLLECTED DATA ON MONITORING WELLS. CHECKED OUT ON ADDITIONAL CONTROL TO ENSURE NO BLUNDERS HAD OCCURRED IN OUR GPS BASE POSITION.

Jacobs

VERIFY SCALES
0 1"
BAR IS ONE INCH ON ORIGINAL DRAWING
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

PLAT SHEET NO.: 1
SCALE: 1"=8'
DRAWN BY: LIP
DESIGNED BY: N/A
TECH REVIEW: DATE:
CHECKED BY: ADW DATE:
APPROVED BY: ADW DATE:

TITLE: SULPHUR BANK MERCURY MINING
CLEARLAKE, CALIFORNIA

PROJECT NO. D3913200
PROJECT ID.: SBMM
DRAWING NO.:
SHT 1 OF 1